

AC Switches - Single-Pole and 3-Way
Industrial Grade 20 Amp, Back and Side Wired

Features - Specifications

- High impact/chemical resistant nylon toggle
- Extra-wide yoke assures structural integrity, brass and nickel plating to resist corrosion
- Color-coded face indicates ampere rating
- Silver cadmium oxide contacts
- Rivetless one-piece copper-alloy contact arm for excellent conductivity
- Exclusive thermoplastic elastomer rocker and coil compression spring
- Back wiring: clamp-type terminals accept up to #10 wire
- Terminal screws: brass combination Phillips/slotted/ Robertson binding head, accepts up to #10 wire

- Grounding connections - green, combination Phillips/slotted/Robertson hex head screw and automatic ground clip
- Approved for CU wire only
- Urea insulating safety barrier
- Strip gauge for accurate back wiring
- Thread cleaning captive combination Phillips/slotted/Robertson mounting screws
- Break-off plaster ears
- AC - general use snap switches are designed for controlling as permitted by the NEC, resistive, inductive, tungsten-filament, fluorescent and motor loads for AC branch lighting and appliance circuits

- UL Listed File #E1464 - Guide #WMUZ
- Verified under Fed Spec. #W-S 896
- CSA Certified File #LR375 - Guide #380-W-19.7
- Complies with UL 20 and NEMA Standard WD-1
- NOM



4901



4903GLI




6901

CATALOG NUMBER		DESCRIPTION
20 AMP	20 AMP	
120-277V AC	347V AC ①②③	
4901	—	Single-pole, brown handle
4901BLK	—	Single-pole, black handle
4901C	6901	Single-pole, brown handle w/Robertson head screws
4901GLC ③	—	Single-pole, clear glow handle
4901GLI ④	—	Single-pole, ivory glow handle
4901GRY	—	Single-pole, gray handle
4901I	—	Single-pole, ivory handle
4901IC	6901I	Single-pole, ivory handle w/Robertson head screws
4901L	—	Single-pole, lock type
4901PLC120 ⑤	—	Single-pole, clear pilot handle, 120V
4901PLC277 ⑤	—	Single-pole, clear pilot handle, 277V
4901PLG120 ⑤	—	Single-pole, green pilot handle, 120V
4901PLR120 ⑤	—	Single-pole, red pilot handle, 120V
4901PLR277 ⑤	—	Single-pole, red pilot handle, 277V
4901RED	—	Single-pole, red handle
4901W	—	Single-pole, white handle
—	6901W	Single-pole, white handle w/Robertson head screws
4903	—	3-way, brown handle
4903BLK	—	3-way, black handle
—	6903	3-way, brown handle w/Robertson head screws
4903GLC ③	—	3-way, clear glow handle
4903GLI ④	—	3-way, ivory glow handle
4903GRY	—	3-way, gray handle
4903I	—	3-way, ivory handle
—	6903I	3-way, ivory handle w/Robertson head screws
4903L	—	3-way, lock type
4903PLC120 ⑤	—	3-way, clear pilot handle, 120V
4903PLG120 ⑤	—	3-way, green pilot handle, 120V
4903PLR120 ⑤	—	3-way, red pilot handle, 120V
4903PLR277 ⑤	—	3-way, red pilot handle, 277V
4903RED	—	3-way, red handle
4903W	—	3-way, white handle
—	6903W	3-way, white handle w/Robertson head screws
6006	—	Key supplied with lock switches

HORSEPOWER RATED

RATING	20 AMP
120V	1 HP
240V	2 HP
MAX	16 AMP

PRODUCT DIMENSIONS - () Indicates mm dimensions

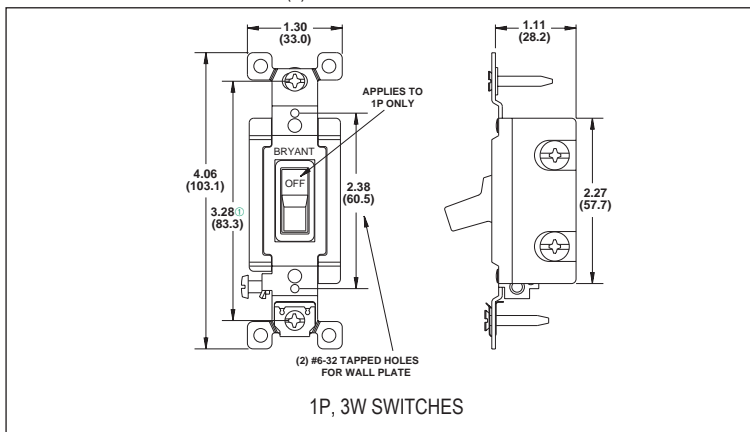

① 3.53 (89.7) mounting dimension on 347 volt switches.
 ② Green hex head grounding screw only.
 ③ CSA certified only.

④ Glow on when switch is "off".
 ⑤ Pilot on when switch is "on". Specifications are subject to change without notice.