

Application

- Octagon boxes are used in the installation of ceiling or wall lighting fixtures


Product Features

- RACO® offers a variety of labor saving mounting brackets that allow for easy positioning of box along studs or joists
- See Box Selection section in the front of this catalog for complete description of bracket types and features
- Fixture bar hanger allows box to be located anywhere along length of bar
- RACO® 326, 8326 includes 3/8" trade sized stud to accommodate fixture stem
- RACO® 296, 296-1 ceiling fan boxes have lock-washers to prevent the high-strength, hardened screws from loosening from vibration
- 296, 296-1 include mounting hardware and instructions

Compliance

-  – File E195978


4" OCTAGON BOXES

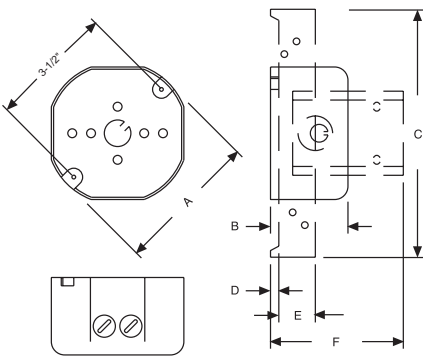


296-1




296

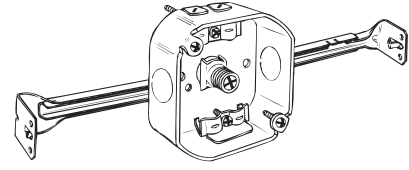


326, 8326



153



155



157

ORDERING INFORMATION - DIMENSIONS

4" OCTAGON CEILING FAN AND FIXTURE BOX – 1-1/2" DEEP – DRAWN WITH NONMETALLIC SHEATHED CABLE CLAMPS – 15.5 CUBIC INCHES								
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE	MAX. RECOMMENDED SUPPORT LOADS	
		SIDES		BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
		CABLE	COND.	COND.				
296-1	—	4	2-1/2"	1-1/2"	20	—	35	75
296	—	4	2-1/2"	1-1/2"	8*		35	75

*Packaged in a stackable, chipboard box suitable for shelf display

4" OCTAGON WITH BAR HANGER – 1-1/2" DEEP – DRAWN WITH NONMETALLIC SHEATHED CABLE CLAMPS – 15.5 CUBIC INCHES								
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE	MAX. RECOMMENDED SUPPORT LOADS	
		SIDES		BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
		CABLE	COND.	COND.				
326	3/8" Stud, adj. 14-1/4" to 22-1/2"	4	2-1/2"	—	25	—	No	10*
8326	3/8" Stud, adj. 14-1/4" to 22-1/2"	4	2-1/2"	—	25		No	10*

*UL Rated at 50 lbs.

4" OCTAGON BOX – 1-1/2" DEEP – DRAWN WITH ARMORED CABLE/METAL CLAD/FLEX CLAMPS – 15.5 CUBIC INCHES								
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUT			STD. PKG.	UPC BAR CODE	MAX. RECOMMENDED SUPPORT LOADS	
		SIDES		BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
		CABLE	COND.	COND.				
153	—	4	2-1/2"	1-1/2"	25		No	50
155	TS brkt., 1/2"	4	1-1/2"	1-1/2"	50		No	50
157	J brkt., 3/8" or 1/2"	4	2-1/2"	1-1/2"	50		No	50

DIMENSIONS

CATALOG NUMBER	A	B	C	D	E	F
296, 296-1	4"	1-9/16"	—	—	—	—
153	4"	1-9/16"	—	—	—	—
155	4"	1-9/16"	7-5/32"	1/2"	1-1/4"	—
157	4"	1-9/16"	—	1/2"	—	3-1/8"