

SWITCH BOXES
SINGLE-GANG - 2-3/4" AND 2-27/32" DEEP

Application

- Switch boxes are used to house wiring devices such as switches or outlets


Product Features

- RACO® 353, 355 and 8355 are extra-wide for ease of GFCI device installation
- RACO® offers a variety of labor saving mounting brackets that allow for easy positioning of box along studs or joists
- See Box Selection section in the front of this catalog for complete description of bracket types and features
- Plaster ears allow the box to be used in "old work" applications

Compliances

-  - File E195978

All RACO® single gang, two gang, 4" square, and single gang gangable U.L. listed steel boxes are acceptable for use in 2-hour fire rated walls. For additional information, consult U.L. "Fire Resistance Directory" or the U.L. website at www.ul.com

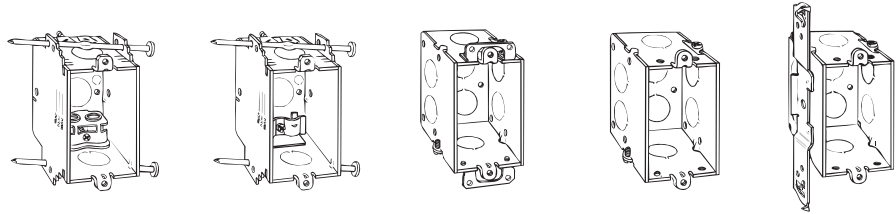

353 355, 8355 560, 565, 8560 561 562


ORDERING INFORMATION - DIMENSIONS

3" x 2-1/8" SWITCH BOX - 2-27/32" DEEP - NONGANGABLE WITH ARMORED CABLE/METAL CLAD/FLEX CLAMPS - 15.8 CUBIC INCHES							
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE	
		SIDE COND.	ENDS				BOTTOM COND.
	CABLE		COND.				
353	S brkt., nails	—	4	—	1-1/2"	50	


3" x 2-1/8" SWITCH BOX - 2-27/32" DEEP - NONGANGABLE WITH NONMETALLIC SHEATHED CABLE CLAMPS - 15.8 CUBIC INCHES							
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE	
		SIDE COND.	ENDS				BOTTOM COND.
	CABLE		COND.				
355	S brkt., nails	—	4	—	1-1/2"	50	—
8355	S brkt., nails	—	4	—	1-1/2"	20	

3" x 2" SWITCH BOXES - 2-3/4" DEEP - GANGABLE WITH CONDUIT KO'S - 14.0 CUBIC INCHES						
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE
		SIDES	ENDS	BOTTOM		
560	Ears	4-1/2"	2-1/2"	2-1/2"	50	—
8560	Ears	4-1/2"	2-1/2"	2-1/2"	50	
565	Ears	4-1/2"	2-3/4"	2-1/2"	50	—
561	Without ears	4-1/2"	2-1/2"	2-1/2"	50	—
562	TS brkt., 1/2"	2-1/2"	2-1/2"	2-1/2"	50	—

CAT. NO. 353, 355, 8355

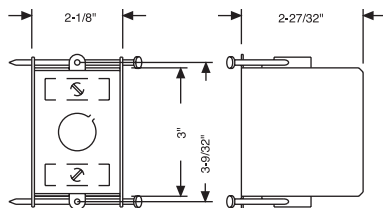

STEEL SWITCH BOXES

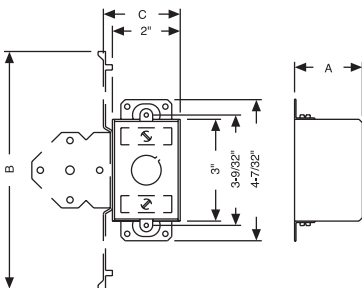

DIMENSIONS			
CATALOG NUMBER	A	B	C
560, 8560	2-3/4"	—	—
565	2-3/4"	—	—
562	2-3/4"	7-5/32"	2-5/16"
561	2-3/4"	7-5/32"	2-5/16"