

### Applications

- RACO® ENT boxes are used in branch circuit wiring to splice wires
- Accommodate wiring devices such as switches and receptacles
- Provide excellent protection for wiring system or devices
- **Ceiling boxes on this page are not designed for ceiling fan support**


### Product Features

- TKO® knockouts offer greater flexibility with RACO's patented combination 1/2" and 3/4" knockout
- TKO® products help to reduce the number of products needed to do the same job

### Standard Material


- Made of heavy-duty engineered compound. Base material is polycarbonate

### Compliances


-  – 514-C, File E195978
- File E104681, R9320
- Boxes are listed for their Electrical Applications (Electrical Codes), UL Green Book
- Boxes are listed for mechanical properties, including the 2-hour Fire Rating, (building codes) UL Orange Book
- ANSI/NEMA TC13-1986
- Federal Manufacturer's number 28488

### Reference Data

- ENT box U.S. Patent 4,844,275
- Mounting Holes U.S. Patent 4,580,689; Canada Patent 1,237,515
- Hex Device Holes U.S. Patent 4,666,055; Canada Patent 1,260,599




7052

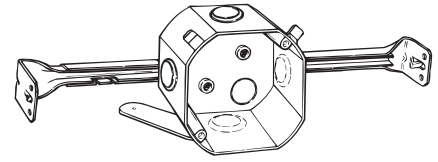


7051

### ORDERING INFORMATION - DIMENSIONS

4" ROUND CEILING BOX FOR ENT – 20.3 CUBIC INCHES							
CATALOG NUMBER	DESCRIPTION	KNOCKOUTS		STD. PKG.	UPC BAR CODE	RECOMMENDED MAX. SUPPORT LOADS	
		SIDES	BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
7052	Bracketed 1/2" Setback	4-TKO®	2-1/2"	50		No	10*

\* UL Rated for 50 lbs.

4" ROUND CEILING - SET-UP FOR SPANNING FROM JOIST TO JOIST FOR ENT – 20.3 CUBIC INCHES							
CATALOG NUMBER	DESCRIPTION	KNOCKOUTS		STD. PKG.	UPC BAR CODE	RECOMMENDED MAX. SUPPORT LOADS	
		SIDES	BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
7051	Adj. 14-1/4" – 22-1/2"	4-TKO®	2-1/2"	25		No	10*

\* UL Rated for 50 lbs.

CAT. NOS. 7052, 7051

