

2-Pole 2-Wire 15 Amp 125V; 20 Amp 250V Straight Blade Devices



9754NS



9755N



9754NSB



556



7847

Features - Specifications

NYLON PLUG AND CONNECTOR

- Impact/chemical-resistant nylon construction with exclusive nonmetallic "Quad Gripper Cord Grip"
- Dead front construction
- Individual wire pockets with clamp-type terminals
- Conform to NEMA/ANSI Standards
- UL Listed File #E1381 – Guide #AXUT
- CSA Certified File #LR16215 – Guide #20T2
- Complies with NEMA Standards WD-1, WD-6 and UL 498
- NOM
- CE

RECEPTACLE

- Brown phenolic body
- Rust-resistant wraparound yoke
- Thread cleaning captive mounting screws
- Side wiring: large binding head screw terminals
- Approved for CU wire only
- UL Listed File #E2258 – Guide #RTRT
- Complies with NEMA Standards WD-1, WD-6 and UL 498


ATTACHMENT PLUG

- Heavy-duty thermoplastic construction
- Adjustable cord grip
- Large terminal and assembly screws for fast wiring
- Individual wire pockets with clamp-type terminals
- UL Listed File #E1381 – Guide #AXUT
- Complies with NEMA Standards WD-1, WD-6 and UL 498

ATTACHMENT PLUG AND CONNECTOR 15 AMP 125V NEMA 1-15

CATALOG NUMBER	CORD DIA.	DESCRIPTION
9754NS	.281-.625 (7.1-15.9)	Plug, black/white nylon, polarized
9754NSB	.281-.625 (7.1-15.9)	Plug, black nylon, polarized, display pak
9755N	.281-.625 (7.1-15.9)	Connector, black/white nylon, polarized

ADAPTER SLEEVE

CATALOG NUMBER	DESCRIPTION
9700S ^①	 Sleeve, strain relief, white, converts SPT cord to round

WEATHER PROTECTIVE BOOT

CATALOG NUMBER	DESCRIPTION
7400BCR ^①	Yellow neoprene boot for use on both 9754-NS and 9755-N


SINGLE RECEPTACLE 20 AMP 250V NEMA 2-20

CATALOG NUMBER	DESCRIPTION
556	Brown phenolic, side wired

ATTACHMENT PLUG 20 AMP 250V NEMA 2-20

CATALOG NUMBER	CORD DIA.	DESCRIPTION
7847	.320-.910 (8.1-23.1)	Yellow thermoplastic, with adjustable cord grip

PRODUCT DIMENSIONS – () Indicates mm dimensions

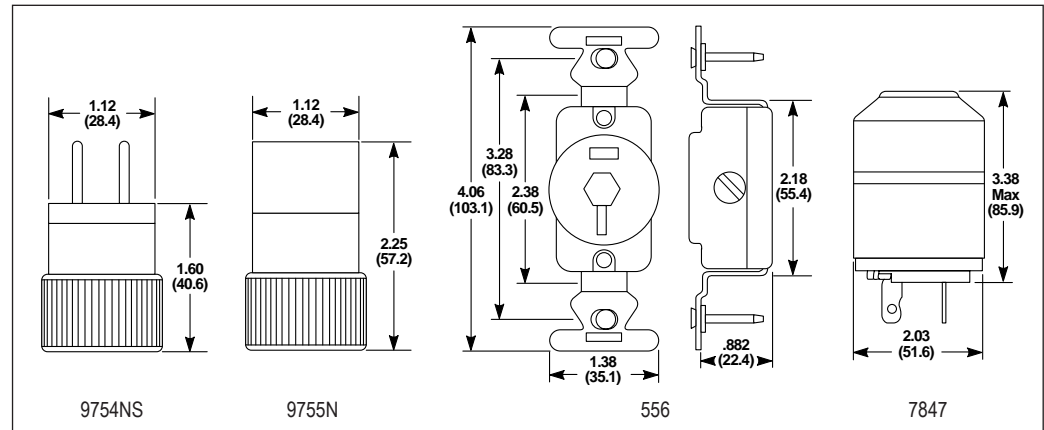

^① Not listed by Underwriters' Laboratories, Inc. See page P-3 for horsepower ratings. Specifications are subject to change without notice.